




Standard Features:

- All stainless steel construction.
- Mechanical deadlock.
- Paracentric stainless steel key and
- Six stainless steel levers.
- Fasteners for mounting.

Optional Features:

- Extended bolt: Used on stop Side and mounting 1 1/4".
- Hollow metal mounting:  
Used for grating door application.  
Specify GM  
Plate mount PM  
Hollow metal HM
- Bolt keeper options:  
Must be specified separately.
- SDB Strike W/Dust box.
- SDBS Strike W/Switch.
- Note: All bolt keepers are supplied with security fasteners.
- Security level medium maximum for small swinging doors
- 10-1 Keyed one side
- 10-2 Keyed both sides

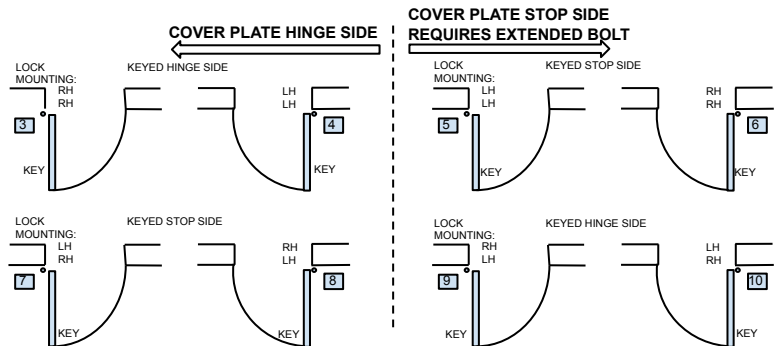

Technical data:

- Cover, Case, Lock bolt, Paracentric cylinder Tumblers, Springs: All stainless steel
- Lock size: 4.4" L x 3.15" H x 1.35" TK
- Lockbolt size: 1 1/2" H x 3/4" TK
- Lockbolt throw: 5/8"
- ASTM 1577 6.8 (50,000 cycles)
- Finish: Passivated