




Standard Features:

- All stainless steel construction.
- Mechanical deadlock.
- ASSA mogul cylinder.
- Fasteners for mounting.

Optional Features:

- Extended bolt: Used on stop
- Side and mounting 1 1/4".
- Hollow metal mounting standard
- Grating door mount specify: GM
- Plate mount specify: PM
- Hollow metal specify: HM
- Bolt keeper options:  
(Must be specified separately)
- SDB Strike W/Dust box.
- SDBS Strike W/Dust box switch.
- Note: All bolt keepers are supplied  
With security fasteners.
- Security level medium maximum
- For small swinging doors
- Master keying available

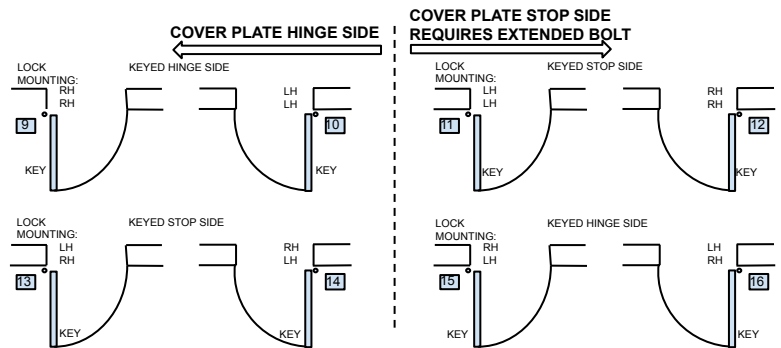

Technical data:

- Cover, Case, Lock bolt:  
All stainless steel
- ASSA Mogul cylinder:  
US26D
- Mogul Keys:  
Nickel Silver
- Finish:  
Passivated
- Lock size:  
4.4" L x 3.15" H x 1.35" TK
- Lockbolt size:  
1 1/2" H x 3/4" TK
- Lockbolt Throw:  
5/8" Standard
- ASTM 1577 Impact grade 1