




Standard Features:

- All stainless steel construction.
- Mechanical deadlock.
- ASSA mogul cylinder.
- Fasteners for mounting.

Optional Features:

- Extended bolt: Used on stop
- Side and mounting 1 1/4".
- Hollow metal mounting standard
- Grating door mount specify: GM
- Plate mount specify: PM
- Hollow metal specify: HM
- Bolt keeper options:
(Must be specified separately)
- SDB Strike W/Dust box.
- SDBS Strike W/Dust box switch.
- Note: All bolt keepers are supplied With security fasteners.
- Security level medium maximum
- For small swinging doors
- Master keying available

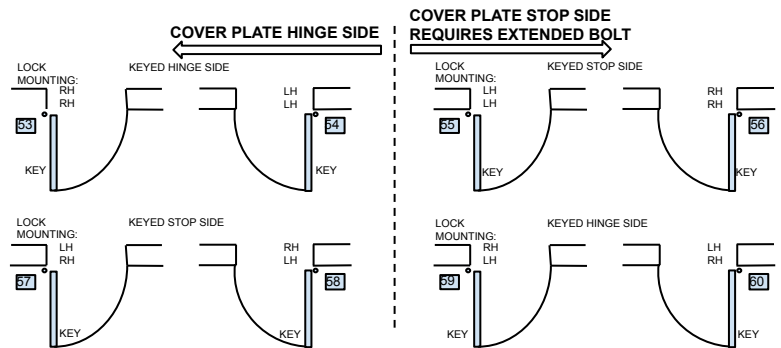

Technical data:

- Cover, Case, Lock bolt: All stainless steel
- ASSA Mogul cylinder: US26D
- Mogul Keys: Nickel Silver
- Finish: Passivated
- Lock size: 5 1/2" L x 3 7/8" H x 1 1/2" TK
- Lockbolt size: 2" H x 3/4" TK
- Lockbolt Throw: 3/4" Standard
- ASTM 1577 Impact grade 1